



TRV



Available Finishes

Chrome	Satin Nickel
Antique Brass	Black Nickel
Polished Brass	Nickel
Pewter	

Amberley TRV Angled Valves Black Nickel

Connection Size

Valve to Radiator	1/2" BSPT
Valve to Pipe	15 mm Compression

Allen Key size

To adjust Lock-Shield	N/A
To fit Coupler to Radiator	SW12
Allen Keys are not included	

Pressure Ratings

Max Test Pressure	16 Bar
Max Operating Pressure	10 Bar
Max Differential Pressure	1 Bar
Pressure Drop Value (Kvs)	2.47 m ³ /h

Kvs value is the metric measure for the flow of a fully opened valve. It is defined as: The volume flow in cubic metres per hour of water at a temperature of between 5° and 40° Celsius with a pressure drop across the valve of 1 bar.

Flow Ratings

Normal Flow Rate	0.61 m ³ /h
Max Flow Rate	2.47 m ³ /h

Temperature Ratings



Max Test Temperature	100°C
Max Operating Temperature	120°C
Temperature Adjustment Range	7-38°C

Disclaimer

All dimensions are approximate and for roughing in only.
We recommend no work be carried out until the goods arrive.
We can take no responsibility for errors in information supplied.

Amberley TRV Angled Valves

Black Nickel

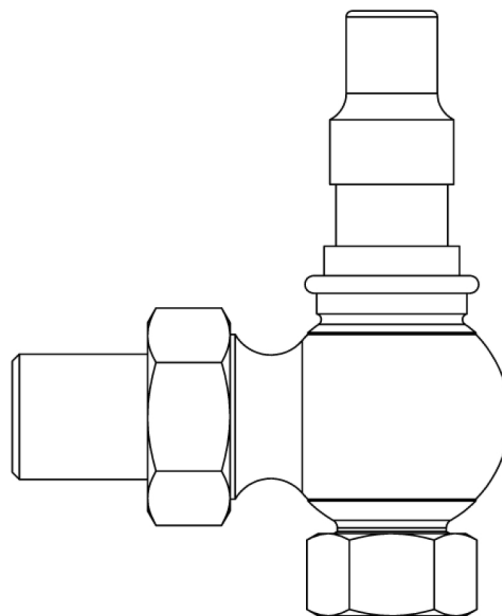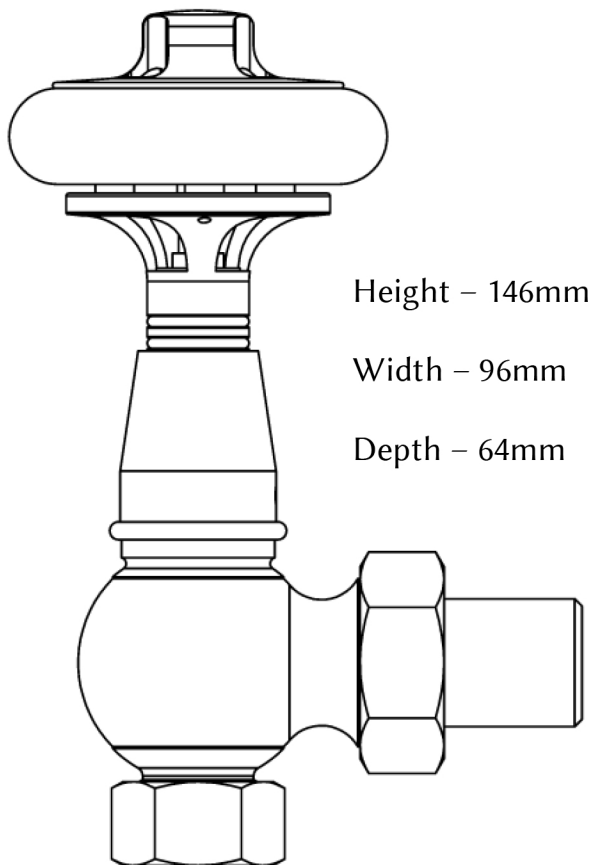

CNM Online

T: 01977 663331 E: cnmservice@cnmonline.co.uk

Unit 2, North Point Business Park, Selby Road, Eggborough, North yorkshire, DN14 0JT