




GW05 80 04 03B

“Towel bar 45 cm “Nimbus series”

BACK VIEW WALL MOUNTING

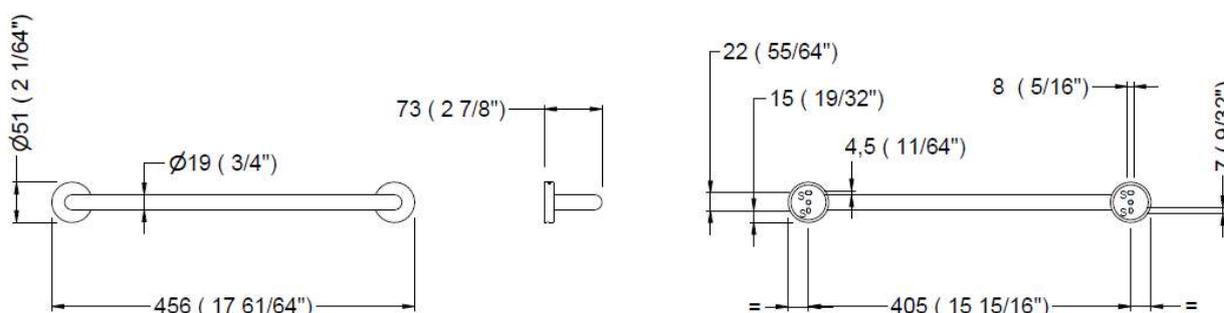

Dimensions: ±3%

TECHNICAL DATASHEET

COMPONENTS AND MATERIALS

- Concealed wall plates (2 units) – AISI 304 stainless steel. Secured to wall with two screws.
- Main body – AISI 304 stainless steel, 2,5mm thickness. Matt black powder coat (RAL 9004), 115 µm thickness. Secured to wall plates with two stainless steel screws.
- Fixings set - Four Ø 6mm wall plugs, four Ø 4mm screws and one Allen key.

OPERATION

Suitable for hotel or residential bathrooms. No specific operation instructions.

MOUNTING

Loosen main body bottom setscrews so wall plates can be removed. Drill four Ø 6mm holes to suit provided wall plugs (6mm) and screws (4mm) at S points indicated in technical design. Secure wall plates to the wall. Place main body and tighten setscrews at the bottom so to secure with wall plates.

ARCHITECTURAL SPECIFICATION

Genwec towel bar “Nimbus series” shall be 2,5mm thickness, AISI 304 stainless steel. Shall be RAL 9004 matt black powder coated with a thickness of 115 µm. Edges should be smooth for user safety.

SPARE PARTS

GW05 80 90 00 – Fixings set