


GW03 02 Paper towel dispenser




GW03 05 04 01
AISI 304 Brushed



GW03 05 04 02
AISI 304 Bright



GW03 05 04 03
AISI 304 Matt Black

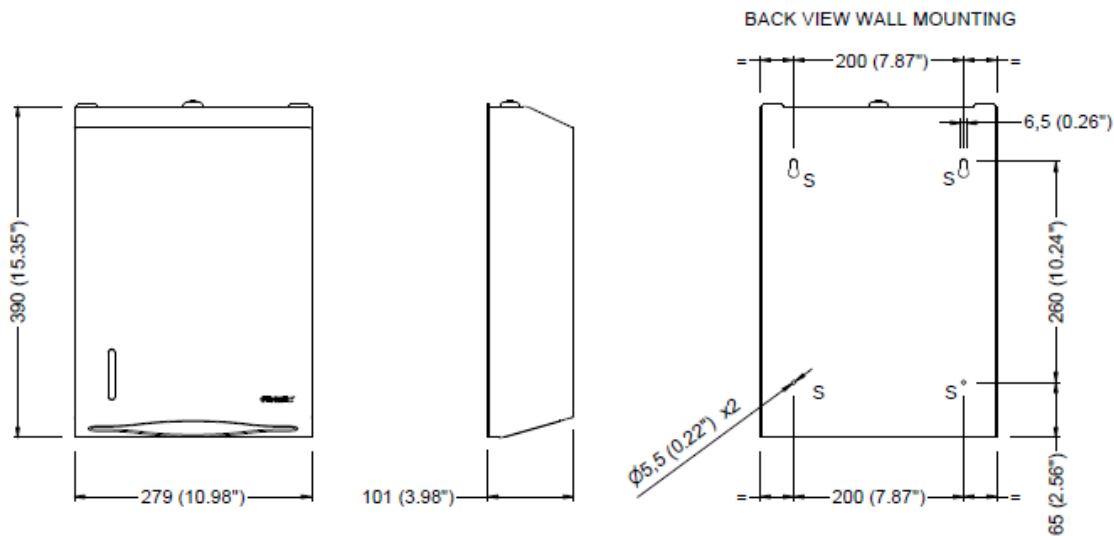

Dimensions: ±3%

TECHNICAL DATASHEET

COMPONENTS AND MATERIALS

- Mounting base – 0.8mm AISI 304 stainless steel. Smooth edges for safety use.
- Lid – One piece, 0.8mm AISI 304 stainless steel, fully sealed. Horizontal slot reveals content level inside dispenser. Supplied with a lock to prevent vandalism. Smooth edges for safety use.
- Fixings set – Two keys for lid opening (one as spare), four Ø 6mm wall plugs, four Ø 4mm screws.

OPERATION

Unit dispenses C-fold or Z-fold paper towels with maximum paper measures of 260 x 98mm. Door unlocks with one of two keys supplied with the unit and swings vertically for loading dispenser. Horizontal slot reveals the paper level for easy control. Unit is capable of dispensing 600 units of C-fold or 450 units of Z-fold paper towel.

MOUNTING

Use technical design provided in technical sheet. Drill four Ø 6mm holes to suit provided wall plugs (6mm) and screws (4mm) at S points indicated in technical design. Recommended installation height is between 900 – 1000mm from floor.

ARCHITECTURAL SPECIFICATION

Genwec paper towel dispenser shall be 0.8mm AISI 304 stainless steel. Edges shall be smooth for user safety. Front lid shall be equipped with a lock to prevent vandalism and a horizontal slot to control paper level. Unit shall be able to fit paper towels with measures of 260 x 98mm. Unit shall be able capable of dispensing 600 C-fold or 450 Z-fold paper towels.

Unit will have a 2 years minimum warranty against material defects and workmanship.

SPARE PARTS

- | | |
|---------------|-------------|
| GW03 02 90 00 | Lock set |
| GW03 02 90 01 | Fixings set |