





## Ultra Dry Pro 2 Turbo Hand Dryer

# H2

Cover:	304 stainless steel
Power:	2 500 W
Noise level:	70 dB
Motor:	7 500 rpm
Voltage:	220 V / 50 Hz
Blowing volume:	270 m³/h
Air speed:	30 m/s
Drying time:	15 sec
Splashproof:	IPX1
Dimensions (mm):	235 × 267 × 142
Weight:	4,2 kg



H = Distance from floor

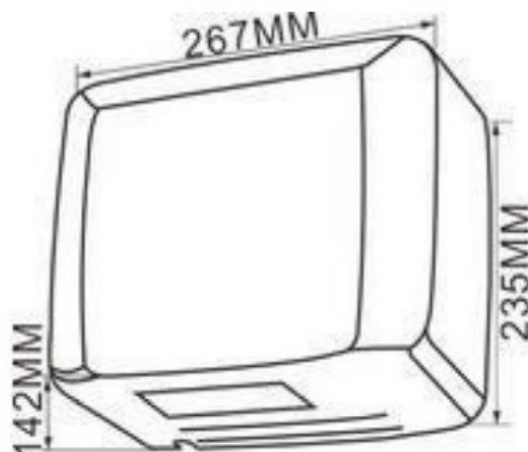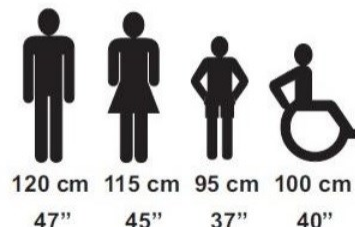

**Materials:** Constructed from 304 stainless steel, available in white and brushed finishes.

**Installation:** Drill four holes in the wall with raw plugs supplied. Screw out the two hexagon socket head cap screw of the shell with the hexagon wrench supplied. Open the connecting line of the sensor. Please do not use too much force when opening the shell. Fix the machine to the wall with the fixing screws enclosed. Reconnect the shell with the sensor lead wire and the shell sensor lead wire. Pay attention that the sensor lead wire is not clipped by the shell when installing the shell.

**Specification:** Ultra Dry Pro 2 Hand Dryer is to be rated at 2500 watts. Noise level is to be 70 decibels at 2 meters. Unit is to be IP rated at IPX1. Air velocity of unit is to be 109 km/h.

**Prestige Radiators Ltd**

Unit 2, North Point Business Park, Selby Road, Eggborough, DN14 0JT

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet.

We reserve the right to make changes and improvements to the design and dimensions.

Revised 21st September 2017

© Prestige Radiators Ltd