


Autofill Wall Mounted 5L With Built in Filtration



Water Boiler Features

- Replaceable water filter provides better tasting beverages and reduces limescale buildup.
- Desired water temperature can be easily set between 98°C down to 70°C for more delicate speciality teas.
- Will dispense upto 206 cups per hour / 31 litres, with 5.7 litre rapid draw-off.
- The boilers eco-mode can be programmed to suit the location, reducing running costs and saving energy.
- Compact and stylish, sits above a counter or sink.
- Robust chrome tap, can be switched between controllable and constant flow.
- Smart diagnostics inform you when filter needs replacing.
- Sturdy stainless steel construction.

Dimensions (mm)

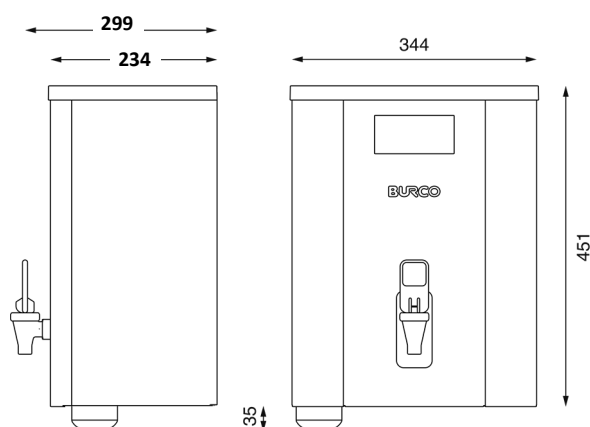

Glen Dimplex Heating & Ventilation, Millbrook House, Grange Drive, Hedge End, Southampton, SO30 2DF

Product Code	069801
Model no.	AFF5WM
EAN Barcode	5011139069801
Product type	Autofill Boiler
Warranty Period	2 years parts and labour

Technical Information

Product Info:

Filtered	Yes
Capacity (litres)	5
Packed Dimensions (WxDxH, mm)	432x490x546
Drip Tray Dimensions (WxDxH, mm)	N/A
Product Weight (kg)	8.8
Packed Weight (kg)	11.5
Colour	Bright Annealed Stainless Steel & Black
Body Construction / Material	430 Stainless Steel
Tank Construction / Material	304 grade Stainless Steel
Trim and drip tray plastic type	PC ABS
Tap Material type	Chrome
Dual Function Tap	Yes
Safety Standards test	EN60335
Nonslip Feet	N/A
Boil Dry cut-out	Yes

Performance:

Heat up Time to 98°C (minutes)	22.5
Rapid Draw off—Litres	5.7
Rapid Draw off—Pints	10
Rapid Draw off—Cups	37
Output per Hr—Litres	31
Output per Hr—Pints	55
Output per Hr—Cups	206
Recovery Per min—Litres	0.5
Recovery Per min—Pints	0.88
Recovery Per min—Cups	3.3
Heat up time 70°C—98°C (minutes)	6.5
Cool down time 98°C—70°C (minutes)	376
Standard power consumption (kW/hr)	0.12

Installation:

Hard wiring required	Yes
UK fitted plug	No
Cable length (m)	NA
Water feed pipe length (m)	2
Max. water inlet pressure (bar)	8
Element power rating	2.8
Phase type	Single
Nominal voltage	230V 50-60Hz
Electrical supply current (A)	13
Water inlet connection fitting	3/4" BSP