

Contemporary TRV Angled Valves - Antique Copper



Connection Size	
Valve to Radiator	1/2" BSPT
Valve to Pipe	15 mm Compression

Allen Key size	
To adjust Lock-Shield	Flathead (Screwdriver)
To fit Coupler to Radiator	15mm
Allen Keys are not included	


Pressure Ratings	
Max Test Pressure	16 Bar
Max Operating Pressure	10 Bar
Max Differential Pressure	1 Bar
Pressure Drop Value (Kvs)	1.2
Kvs value is the metric measure for the flow of a fully opened valve. It is defined as: The volume flow in cubic metres per hour of water at a temperature of between 5° and 40° Celsius with a pressure drop across the valve of 1 bar.	

Flow Ratings	
Normal Flow Rate	1.25m ³ /h
Max Flow Rate	1.74m ³ /h

Temperature Ratings	
Max Test Temperature	50°C
Max Operating Temperature	40°C
Temperature Adjustment Range	7 - 32 °C

Disclaimer	
All dimensions are approximate and for roughing in only.	
We reserve the right to alter dimensions without notice.	
We recommend no work be carried out until the goods arrive.	
We can take no responsibility for errors in information supplied.	

Available Finishes	
Anthracite	Antique Brass
Chrome	Gunboat Grey
White	Matte Metallic Grey
Satin Nickel	Metallic Grey
Textured Black	

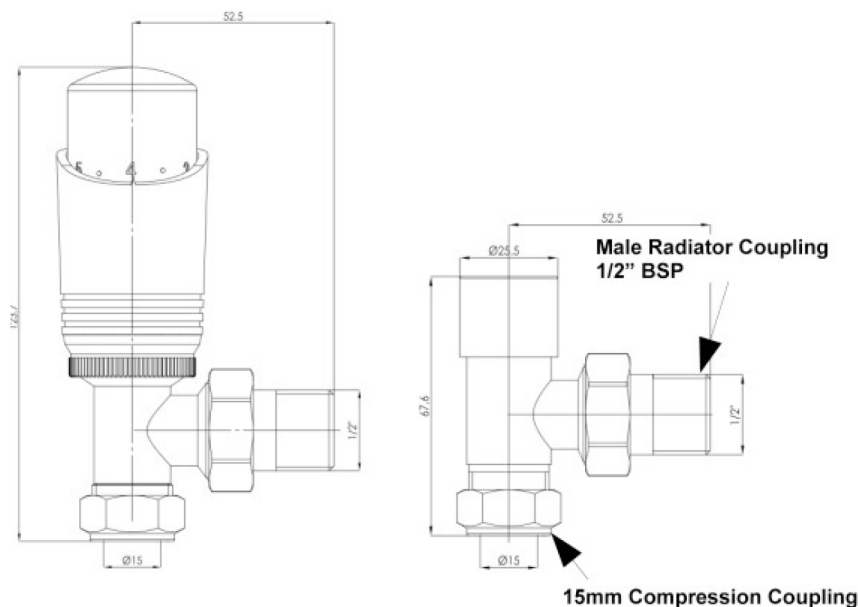

CNM Online

T: 01977 663331 E: cnmservice@cnmonline.co.uk

Unit 2, North Point Business Park, Selby Road, Eggborough, North yorkshire, DN14 0JT