




Prestige Automatic Hook Faucet

DH311

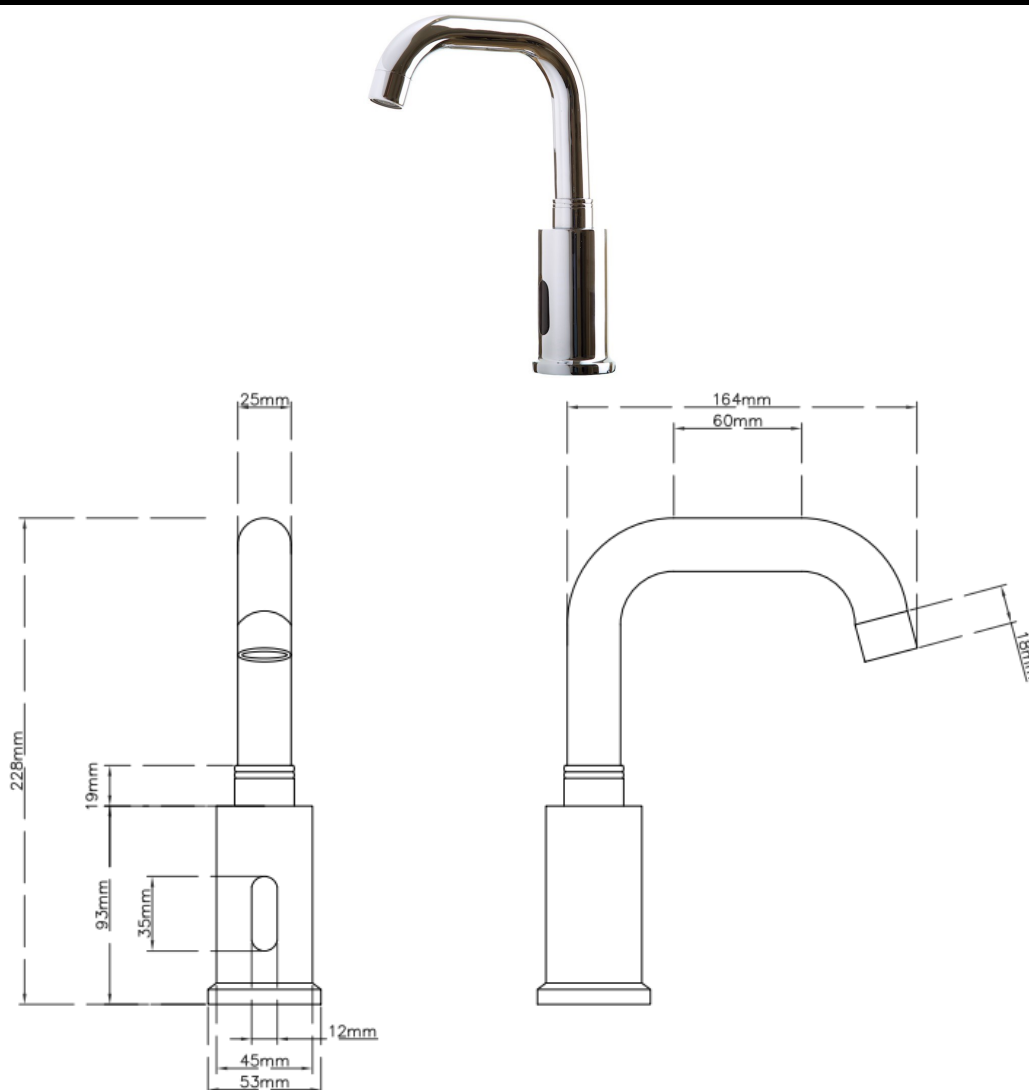

Materials: Constructed from chrome plated brass with exposed surfaces polished finish.

Installation: Spout—Thread the pipe and power wire through the metal and rubber plate and the rubber gasket then through the counter top and screw the metal thread supplied from underneath the counter into the unit until tight then tighten up the nut until tight.

Electrical Box—Drill two screws through the holes at either side of the electrical box. Connect the water pipe from the faucet onto the “water out” on the electrical box. Connect the two power cables together. Connect mains water to “water in”.

Please take care with cables to not trap them when installing. Please also make sure mains water is switched off before installing.

Specification: Prestige Automatic Arc Faucet for counter mounting operation. Counter hole cut out: 33-35 mm. Counter top maximum thickness 30 mm. Power supply: AC220V. Standby power usage $\leq 0.5\text{mw}$. Water pressure 0.05~0.6MPa. Minimum water temperature degrees Celsius 0. Maximum temperature degrees Celsius 80. Detection zone of sensor 12-18cm.

Prestige Radiators Ltd

Unit 2, North Point Business Park, Selby Road, Eggborough, DN14 0JT

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet.

We reserve the right to make changes and improvements to the design and dimensions.

Revised 21st September 2017

© Prestige Radiators Ltd