



# Simply Silent™ LV100

**Models:** LV100S, LV100TS, LV100PS, LV100HTS, LV100HPTS, LV100PIRS


The Simply Silent™ LV100 (Low Volt) models are designed specifically for safe installation directly in or over the splash area zone 1, offering complete peace of mind. These models are supplied with a 12V SELV transformer, positioned out of reach of any person using the bath or shower. The LV100 range has two speeds, selectable at install, and features a wall-fitting kit.

The range is suitable for wall, ceiling and window fitting (requires Simply Silent Window Kit Plus - 93235AA)

## Technical Details

	All Models
No. of Speeds	2
Power (W)	5.5 / 11.8
Duct Size (mm)	100
Flow rate (l/s)	15/21
Flow rate (m3/h)	54/76
Noise dB(A)3m	22/34
Specific Fan Power SFP (W/l/s)	0.37 / 0.56
IPX Rating	IPX4
Motor Type	AC
Integral backdraught shutter	X
Height (mm) square / round	178.5/178.1
Width (mm) square / round	178.5/178.1
Depth (mm)	122.2
Colour	White

## Dimensions

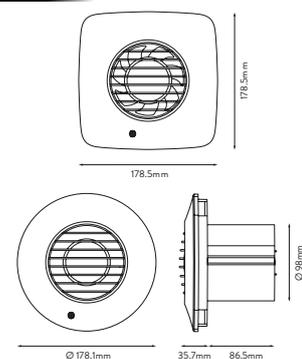

Country of Origin	Ireland
Guarantee Period	2 Years

Models	Design	Standard	Timer (adjustable from 30s - 30mins)	Pullcord	Humidistat (50-90% RH)	PIR	Wall Fitting Kit Supplied
LV100S	93031AW	■	✓				✓
LV100TS	93032AW	■	✓				✓
LV100PS	93033AW	■		✓			✓
LV100HTS	93034AW	■	✓		✓		✓
LV100HPTS	93035AW	■	✓	✓	✓		✓
LV100PIRS	93036AW	■	✓			✓	✓



# Simply Silent™ LV100

**Models:** LV100S, LV100TS, LV100PS, LV100HTS,  
LV100HPTS, LV100PIRS


The Simply Silent™ LV100 (Low Volt) models are designed specifically for safe installation directly in or over the splash area zone 1, offering complete peace of mind. These models are supplied with a 12V SELV transformer, positioned out of reach of any person using the bath or shower. The LV100 range has two speeds, selectable at install, and features a wall-fitting kit.

The range is suitable for wall, ceiling and window fitting (requires Simply Silent Window Kit Plus - 93235AA)

## Technical Details

	All Models
No. of Speeds	2
Power (W)	5.5 / 11.8
Duct Size (mm)	100
Flow rate (l/s)	15/21
Flow rate (m3/h)	54/76
Noise dB(A)3m	22/34
Specific Fan Power SFP (W/l/s)	0.37 / 0.56
IPX Rating	IPX4
Motor Type	AC
Integral backdraught shutter	X
Height (mm) square / round	178.5/178.1
Width (mm) square / round	178.5/178.1
Depth (mm)	122.2
Colour	White

## Dimensions

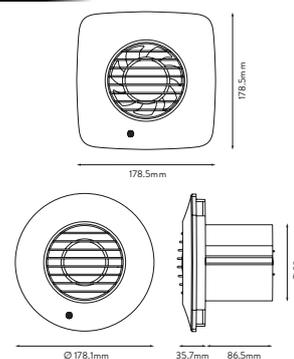

Country of Origin	Ireland
Guarantee Period	2 Years

Models	Design	Standard	Timer (adjustable from 30s - 30mins)	Pullcord	Humidistat (50-90% RH)	PIR	Wall Fitting Kit Supplied
LV100S	93031AW	■	✓				✓
LV100TS	93032AW	■	✓				✓
LV100PS	93033AW	■		✓			✓
LV100HTS	93034AW	■	✓		✓		✓
LV100HPTS	93035AW	■	✓	✓	✓		✓
LV100PIRS	93036AW	■	✓			✓	✓



# Simply Silent™ LV100

**Models:** LV100S, LV100TS, LV100PS, LV100HTS, LV100HPTS, LV100PIRS


The Simply Silent™ LV100 (Low Volt) models are designed specifically for safe installation directly in or over the splash area zone 1, offering complete peace of mind. These models are supplied with a 12V SELV transformer, positioned out of reach of any person using the bath or shower. The LV100 range has two speeds, selectable at install, and features a wall-fitting kit.

The range is suitable for wall, ceiling and window fitting (requires Simply Silent Window Kit Plus - 93235AA)

## Technical Details

	All Models
No. of Speeds	2
Power (W)	5.5 / 11.8
Duct Size (mm)	100
Flow rate (l/s)	15/21
Flow rate (m3/h)	54/76
Noise dB(A)3m	22/34
Specific Fan Power SFP (W/l/s)	0.37 / 0.56
IPX Rating	IPX4
Motor Type	AC
Integral backdraught shutter	X
Height (mm) square / round	178.5/178.1
Width (mm) square / round	178.5/178.1
Depth (mm)	122.2
Colour	White

## Dimensions

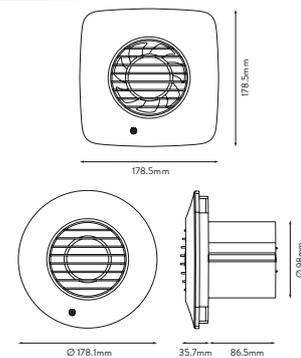

Models	Design	Standard	Timer (adjustable from 30s - 30mins)	Pullcord	Humidistat (50-90% RH)	PIR	Wall Fitting Kit Supplied
<b>LV100S</b>	93031AW	■	✓				✓
<b>LV100TS</b>	93032AW	■	✓				✓
<b>LV100PS</b>	93033AW	■		✓			✓
<b>LV100HTS</b>	93034AW	■	✓		✓		✓
<b>LV100HPTS</b>	93035AW	■	✓	✓	✓		✓
<b>LV100PIRS</b>	93036AW	■	✓			✓	✓

**Country of Origin** Ireland

**Guarantee Period** 2 Years



# Simply Silent™ LV100

**Models:** LV100S, LV100TS, LV100PS, LV100HTS,  
LV100HPTS, LV100PIRS

The Simply Silent™ LV100 (Low Volt) models are designed specifically for safe installation directly in or over the splash area zone 1, offering complete peace of mind. These models are supplied with a 12V SELV transformer, positioned out of reach of any person using the bath or shower. The LV100 range has two speeds, selectable at install, and features a wall-fitting kit.


The range is suitable for wall, ceiling and window fitting (requires Simply Silent Window Kit Plus - 93235AA)

Models	Design	Standard	Timer (adjustable from 30s - 30mins)	Pullcord	Humidistat (50-90% RH)	PIR	Wall Fitting Kit Supplied
<b>LV100S</b>	93031AW	■	✓				✓
<b>LV100TS</b>	93032AW	■	✓				✓
<b>LV100PS</b>	93033AW	■		✓			✓
<b>LV100HTS</b>	93034AW	■	✓		✓		✓
<b>LV100HPTS</b>	93035AW	■	✓	✓	✓		✓
<b>LV100PIRS</b>	93036AW	■	✓			✓	✓

## Technical Details

	All Models
<b>No. of Speeds</b>	2
<b>Power (W)</b>	5.5 / 11.8
<b>Duct Size (mm)</b>	100
<b>Flow rate (l/s)</b>	15/21
<b>Flow rate (m3/h)</b>	54/76
<b>Noise dB(A)3m</b>	22/34
<b>Specific Fan Power SFP (W/l/s)</b>	0.37 / 0.56
<b>IPX Rating</b>	IPX4
<b>Motor Type</b>	AC
<b>Integral backdraught shutter</b>	<b>X</b>
<b>Height (mm) square / round</b>	178.5/178.1
<b>Width (mm) square / round</b>	178.5/178.1
<b>Depth (mm)</b>	122.2
<b>Colour</b>	White

## Dimensions

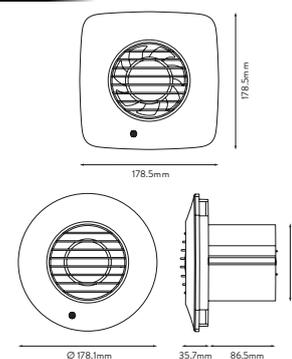

<b>Country of Origin</b>	Ireland
<b>Guarantee Period</b>	2 Years



# Simply Silent™ LV100


**Models:**
**LV100S, LV100TS, LV100PS, LV100HTS,  
LV100HPTS, LV100PIRS**

The Simply Silent™ LV100 (Low Volt) models are designed specifically for safe installation directly in or over the splash area zone 1, offering complete peace of mind. These models are supplied with a 12V SELV transformer, positioned out of reach of any person using the bath or shower. The LV100 range has two speeds, selectable at install, and features a wall-fitting kit.

The range is suitable for wall, ceiling and window fitting (requires Simply Silent Window Kit Plus - 93235AA)

**Technical Details**

	<u>All Models</u>
<b>No. of Speeds</b>	2
<b>Power (W)</b>	5.5 / 11.8
<b>Duct Size (mm)</b>	100
<b>Flow rate (l/s)</b>	15/21
<b>Flow rate (m3/h)</b>	54/76
<b>Noise dB(A)3m</b>	22/34
<b>Specific Fan Power SFP (W/l/s)</b>	0.37 / 0.56
<b>IPX Rating</b>	IPX4
<b>Motor Type</b>	AC
<b>Integral backdraught shutter</b>	<b>X</b>
<b>Height (mm) square / round</b>	178.5/178.1
<b>Width (mm) square / round</b>	178.5/178.1
<b>Depth (mm)</b>	122.2
<b>Colour</b>	White

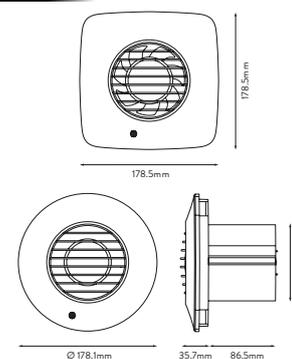**Dimensions**


<b>Country of Origin</b>	Ireland
<b>Guarantee Period</b>	2 Years

Models	Design	Standard	Timer (adjustable from 30s - 30mins)	Pullcord	Humidistat (50-90% RH)	PIR	Wall Fitting Kit Supplied
<b>LV100S</b>	93031AW	■	✓				✓
<b>LV100TS</b>	93032AW	■	✓				✓
<b>LV100PS</b>	93033AW	■		✓			✓
<b>LV100HTS</b>	93034AW	■	✓		✓		✓
<b>LV100HPTS</b>	93035AW	■	✓	✓	✓		✓
<b>LV100PIRS</b>	93036AW	■	✓			✓	✓



# Simply Silent™ LV100


**Models:**
**LV100S, LV100TS, LV100PS, LV100HTS,  
LV100HPTS, LV100PIRS**

The Simply Silent™ LV100 (Low Volt) models are designed specifically for safe installation directly in or over the splash area zone 1, offering complete peace of mind. These models are supplied with a 12V SELV transformer, positioned out of reach of any person using the bath or shower. The LV100 range has two speeds, selectable at install, and features a wall-fitting kit.

The range is suitable for wall, ceiling and window fitting (requires Simply Silent Window Kit Plus - 93235AA)

**Technical Details**

	<u>All Models</u>
<b>No. of Speeds</b>	2
<b>Power (W)</b>	5.5 / 11.8
<b>Duct Size (mm)</b>	100
<b>Flow rate (l/s)</b>	15/21
<b>Flow rate (m3/h)</b>	54/76
<b>Noise dB(A)3m</b>	22/34
<b>Specific Fan Power SFP (W/l/s)</b>	0.37 / 0.56
<b>IPX Rating</b>	IPX4
<b>Motor Type</b>	AC
<b>Integral backdraught shutter</b>	<b>X</b>
<b>Height (mm) square / round</b>	178.5/178.1
<b>Width (mm) square / round</b>	178.5/178.1
<b>Depth (mm)</b>	122.2
<b>Colour</b>	White

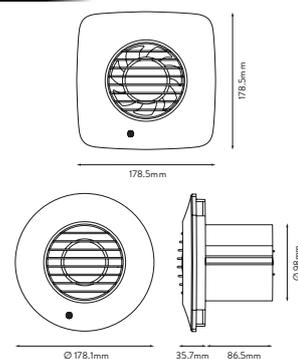**Dimensions**


<b>Country of Origin</b>	Ireland
<b>Guarantee Period</b>	2 Years

Models	Design	Standard	Timer (adjustable from 30s - 30mins)	Pullcord	Humidistat (50-90% RH)	PIR	Wall Fitting Kit Supplied
<b>LV100S</b> 93031AW	■	✓					✓
<b>LV100TS</b> 93032AW	■		✓				✓
<b>LV100PS</b> 93033AW	■			✓			✓
<b>LV100HTS</b> 93034AW	■		✓		✓		✓
<b>LV100HPTS</b> 93035AW	■		✓	✓	✓		✓
<b>LV100PIRS</b> 93036AW	■		✓			✓	✓