

ELECTRICAL WARNING - THIS APPLIANCE MUST BE EARTHED. SUITABLE FOR FIXED WIRING ONLY

ALWAYS ENSURE THAT THE INSTALLATION CONFORMS TO THE CURRENT EDITION OF THE IEE WIRING REGULATIONS. IN PARTICULAR ENSURE THAT THE UNIT IS PROPERLY EARTHED AND SEPARATELY FUSED WITH A SUITABLY RATED FUSE, ALSO ENSURE THAT IT IS CONNECTED TO THE SUPPLY VIA A DOUBLE POLE SWITCH HAVING A CONTACT SEPARATION OF AT LEAST 3 mm.

CARE SHOULD BE TAKEN THAT SINGLE INSULATED CONDUCTORS CANNOT COME INTO CONTACT WITH THE MOUNTING SURFACE.

AFTER INSTALLATION OR SERVICING, UNITS MUST BE CHECKED, AND ONLY LEFT WHEN ELECTRICALLY AND MECHANICALLY SAFE.

When ordering replacement modules always quote SERIAL NO., MODEL, ELECTRICAL SUPPLY VOLTAGE AND FREQUENCY.


In the event of any part being found to be defective, the hand dryer will be repaired, or at the Manufacturers option replaced, without charge, provided that the hand dryer:

a) has been installed and used in accordance with the instructions given with each materials or workmanship. The hand dryer is Guaranteed for five years from the date of purchase against faulty Guarantee

b) has not been connected to an unsuitable electrical supply. (Correct requirements are stated on the units rating label) electricity supply

has not been subjected to mis-use, neglect or damage.

has been properly serviced in accordance with the instructions' given with each unit. has not been modified or repaired by any person not authorised by the Manufacturer. 's guarantee excludes labour after an initial 12 month period.

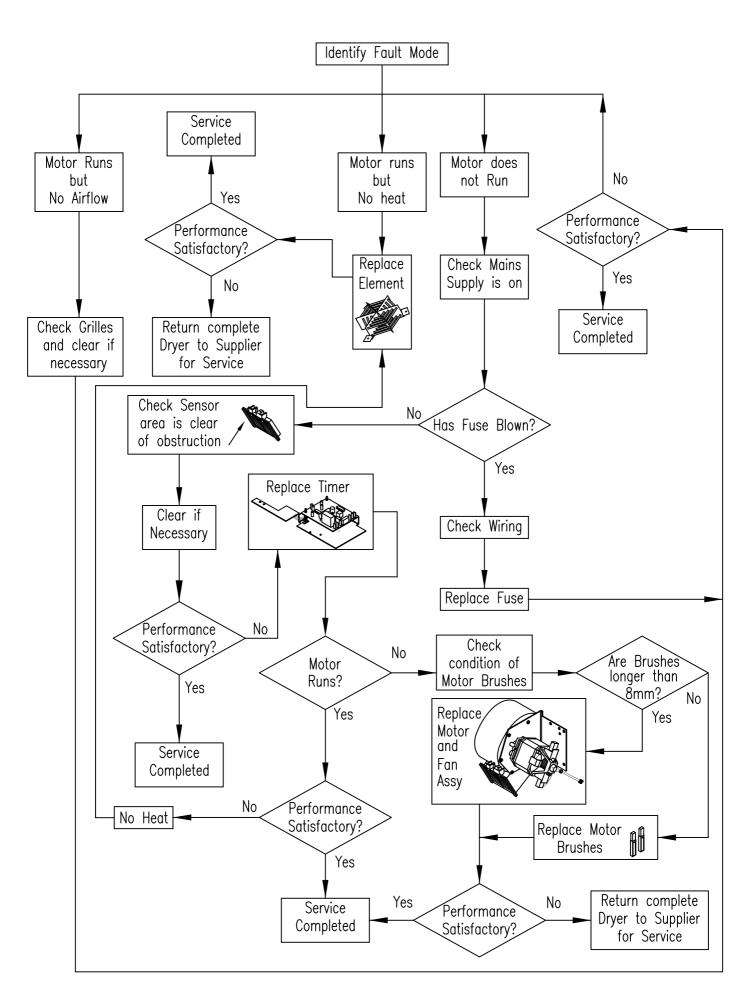

FAULT DIAGNOSIS CHART