

A



Dimensions



Key Features


- Small and compact inline instantaneous water heater ideal for hand basin supply
- Instantaneous heating at point of use, eliminates long inefficient pipe run heat loss to a centrally located cylinder, saving space and energy
- Suitable for two hand wash basins or a manual mixer shower and hand basin (with the RM1 accessory)
- There is an option to disable one of the two heating elements internally at installation to reduced power
- A Energy efficiency rated with a manufacturers 2 year UK guarantee

Product Range

| Item Code: | Model No: | Description | kW |
|------------|-----------|---------------------------------------|------|
| 45793201 | RP1 | Powerstream Instant Inline Water Htr. | 9.5 |
| 45793204 | RP10.8 | Powerstream Instant Inline Water Htr. | 10.8 |
| 45793202 | RP12 | Powerstream Instant Inline Water Htr. | 12 |

Accessories

| Item Code: | Model No: | Description |
|------------|-----------|------------------------------|
| 85793620 | RM1 | Powerstream Shower Mixer Kit |

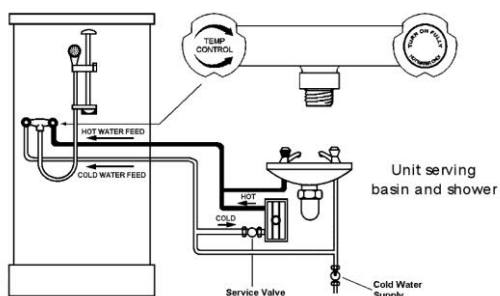

Technical Details

| Model | RP1 | RP10.8 | RP12 |
|-------------------------------|-----------------------------------|-------------------|-------------------|
| EAN /Bar Code No. | 501708 4453106 | 501708 4452040 | 501708 4452026 |
| Power Output (kW) | 9.5 | 10.8 | 12 |
| 50% Power (kW) set at install | 4.75 | 5.4 | 6 |
| Current Rating (Amps) @240V | 40 | 45 | 50 |
| Element Resistance (Ohms) | 12 | 10.6 | 9.6 |
| Thermal Cut-out Protection | 2 stage - cyclic and manual reset | | |
| Energy Rating (Class) | A | A | A |
| Energy Rating (%) | 39 | 39 | 39 |
| Consumption (kWh/A) | 473 | 468 | 469 |
| Load Profile | XS | XS | XS |
| Sound (dB) | 15 | 15 | 15 |
| Operating Pressure psi/(bar) | 10 (0.7) - 150 (10.3) | | |
| Minimum Flow Rate (l/min) | 2.7 | 3.3 | 3.3 |
| Water Connections | Ø15mm plain copper shank | | |
| IP Rating | IPX4 | IPX4 | IPX4 |
| Box Dimensions (mm) | 374 x 185 x 86 | | |
| Gross Weight (kg) | 2.2 | 2.2 | 2.2 |
| Net Weight (kg) | 2 | 2 | 2 |
| Pallet Quantity | 110 | 110 | 110 |
| Approvals / Mark | BEAB & CE | BEAB & CE | BEAB & CE |
| UK Guarantee (years) | 2 | 2 | 2 |

